EVERLIGHT AUTOMOTIVE

DATASHEET

EL SIDE VIEW LED
57-11-C70300H-AM



Features

- Package：PLCC 2 package
- Color：Cool White
- Typ. Luminance Intensity： 3200 mcd @ 30mA
- Viewing angle：120°
- ESD：8KV
- MSL：3
- Typ.color coordinates : (0.29,0.29)
- Qualified AEC-Q102
- Sulfur robustness：Class B1
- Compliance with RoHS and REACH
- Compliance with EU REACH.
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm)

Applications

- Automotive interior lighting.
- Switches.

Contents

1. Characteristics 3
2. Absolute Maximum Ratings 4
3. Characteristics Graph 5
4. Binning Information 10
5. Part Number 15
6. Ordering Information 16
7. Mechanical Dimension 17
8. Recommended Soldering Pad 18
9. Reflow Soldering Profile 18
10. Packaging Information 19
11. Precaution for Use 21
12. Sulfur Test Criteria 22

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

1. Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Current		I_F	6	30	60	mA	---
Luminous Intensity		I_V	2240	3200	4500	mcd	I_F=30mA
Forward Voltage		V_F	2.75	2.9	3.75	V	I_F=30mA
Viewing Angle		φ	---	120	---	deg	I_F=30mA
Color		CIE x	---	0.29	---		I_F=30mA
Color		CIE y	---	0.29	---	---	I_F=30mA
Thermal Resistance (Junction to Solder)	Real	$R_{th\ JS\ real}$	---	---	180	K/W	I_F=30mA
	Electrical	$R_{th\ JS\ el}$	---	---	100		

Notes:

1. Luminous Flux measurement tolerance: ±11%.
2. The data of Luminous Flux measured at thermal pad=25°C
3. Forward voltage measurement tolerance: ±0.05V
4. The V_F range shown in the table above indicates 99% output.3
5. Tolerance of Chromaticity Coordinates x,y：±0.005

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

2. Absolute Maximum Ratings


Parameter	Symbol	Ratings	Unit
Power Dissipation	P_d	225	mW
Forward Current	I_F	60	mA
Surge Current (t<=10 μs; D=0.005; T_s=25 ℃)	I_{FM}	250	mA
Reverse Voltage	V_R	Not designed for reverse operation	V
Junction Temperature	T_J	125	°C
Operating Temperature	T_{opr}	-40 ~ +110	°C
Storage Temperature	T_{stg}	-40 ~ +110	°C
ESD Sensitivity (R=1.5kΩ, C= 100pF)	ESD_{HBM}	8	kV
Soldering Temperature	Reflow	260°C for 30sec	°C

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

3. Characteristics Graph


Wavelength Characteristics Relative Spectral Distribution
@ Ts = 25°C, I_F=30mA

$\Phi_V / \Phi_V\,(Max.) = f(\lambda)$

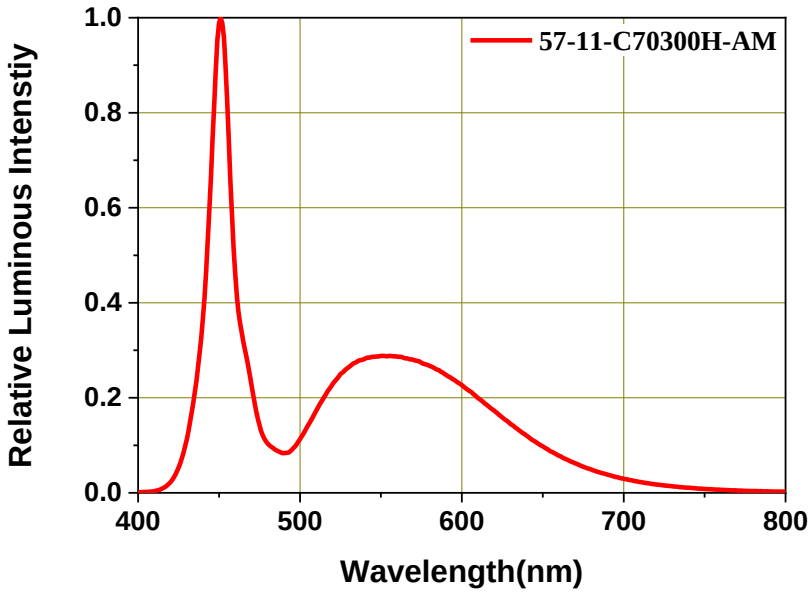

Typical Diagram Characteristics of Radiation

$\Phi_V / \Phi_V\,(0^\circ) = f(\varphi)$

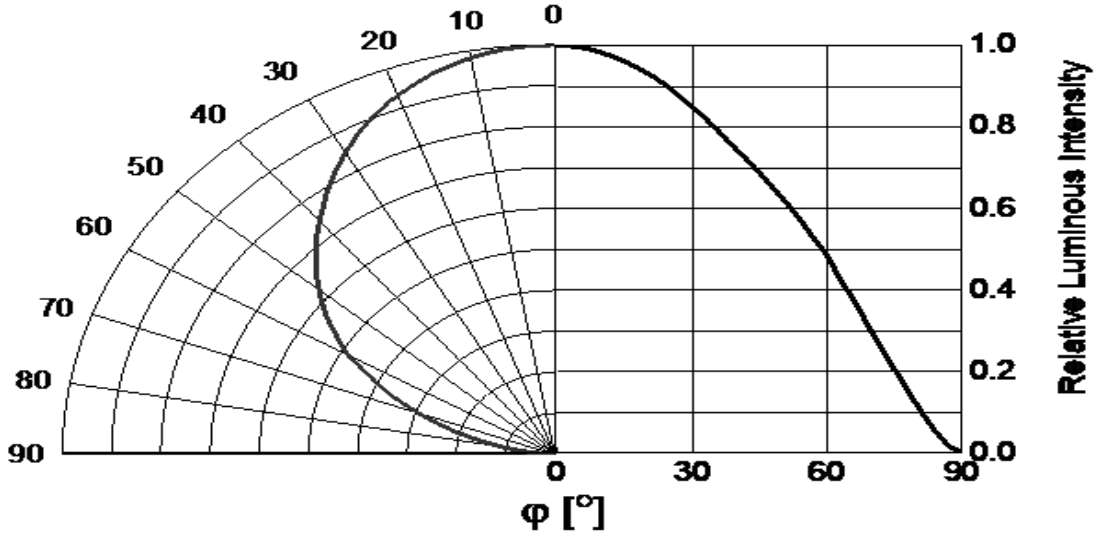


Notes:

1. φ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5°.

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1


Forward Current vs. Forward Voltage
@ Ts = 25°C

$$I_F = f(V_F)$$

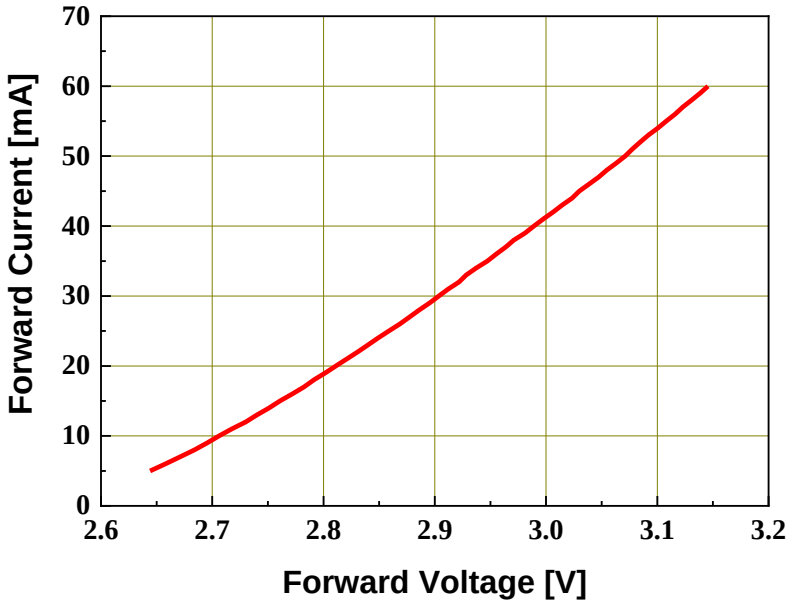

Relative Luminous Intensity vs. Forward Current
@ Ts = 25°C

$$\Phi_V / \Phi_V\,(30mA) = f(I_F)$$

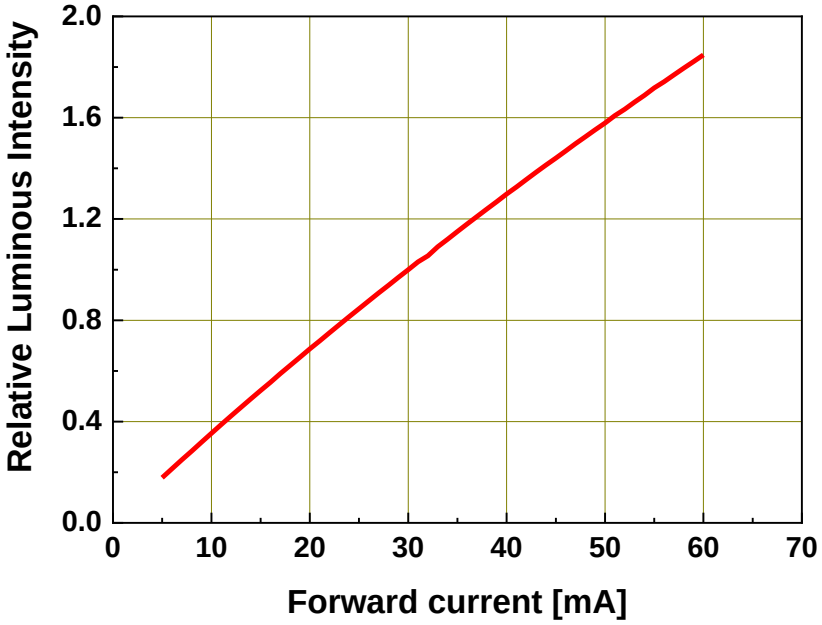


Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

Chromaticity Coordinates Shift vs. Forward Current

@ Ts = 25°C


$$\triangle CIE\ x, \triangle CIE\ y = f(I_F)$$

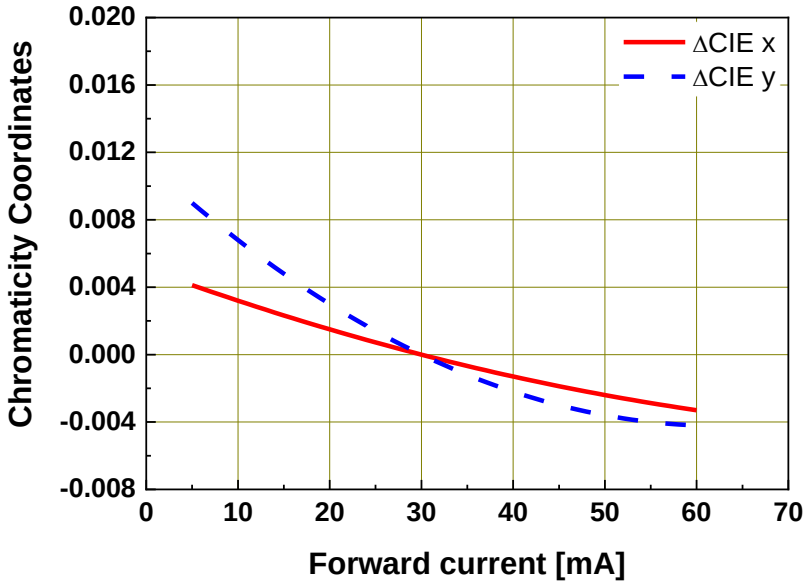

Relative Forward Voltage vs. Junction Temperature

@ IF=30mA

$$\Delta V_F = V_F - V_F(25^\circ C) = f(T_j)$$

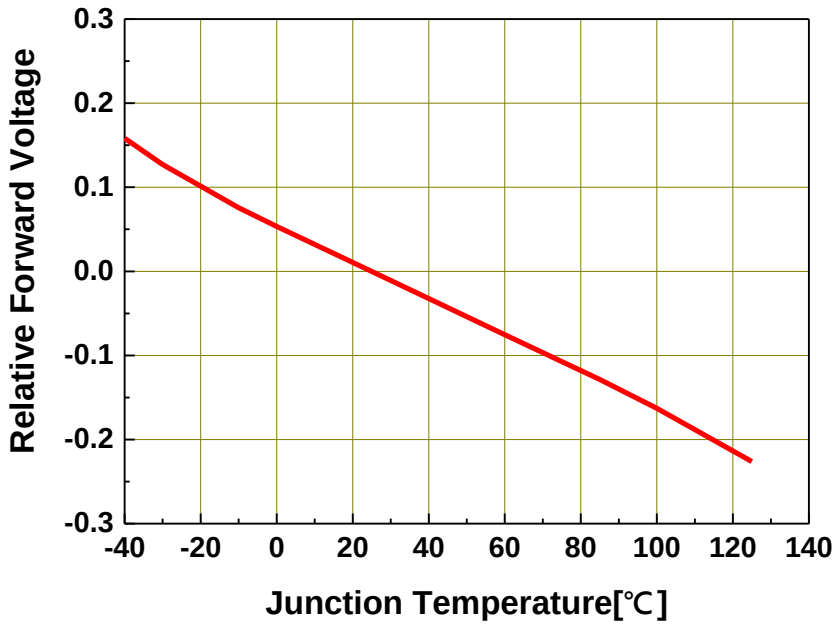


Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

Relative Luminous Intensity vs. Junction Temperature

@ I_F=30mA


$$\Phi_V / \Phi_V(25^\circ C) = f(T_j)$$

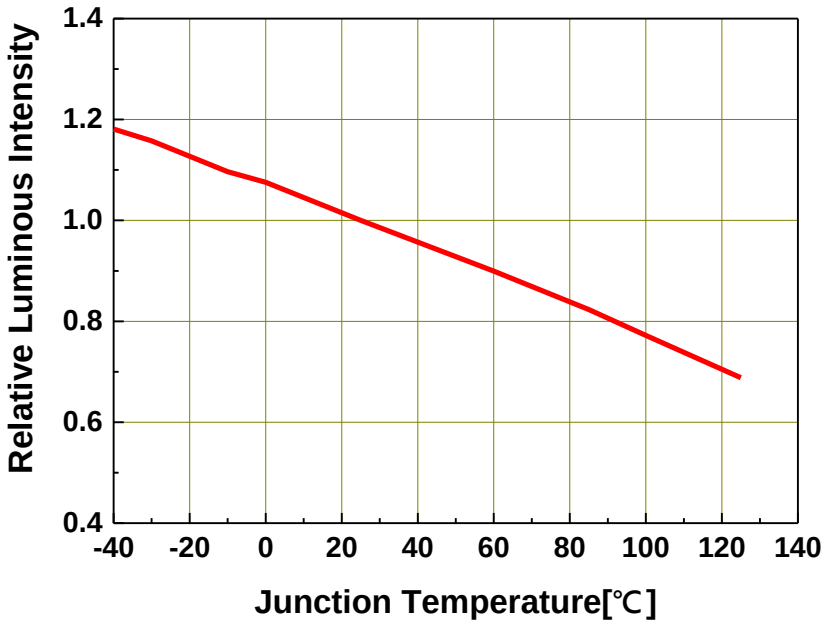

Chromaticity Coordinates Shift vs. Junction Temperature

@ I_F=30mA


$$\triangle CIE\ x, \triangle CIE\ y = f(T_j)$$

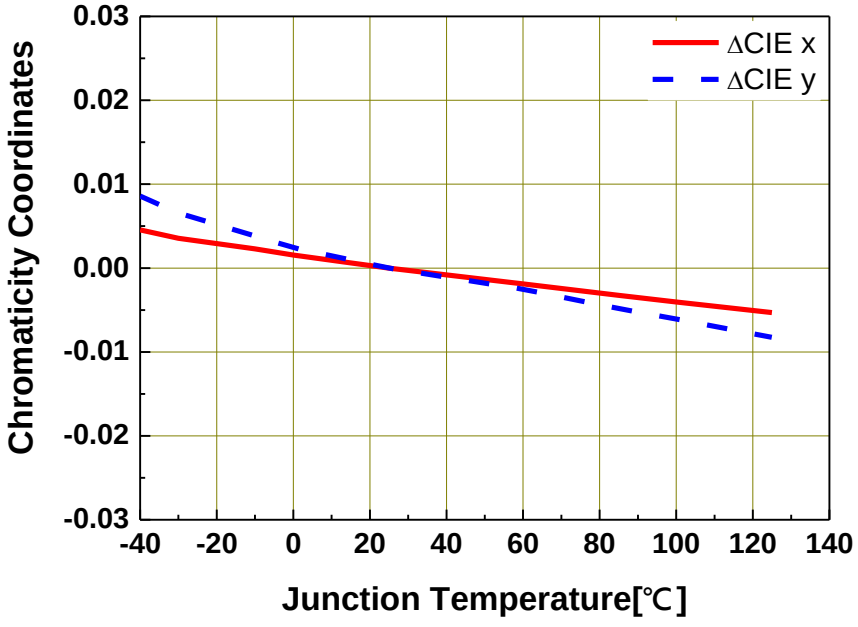

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1


Forward Current Derating Curve

$$I_F = f(T_S)$$

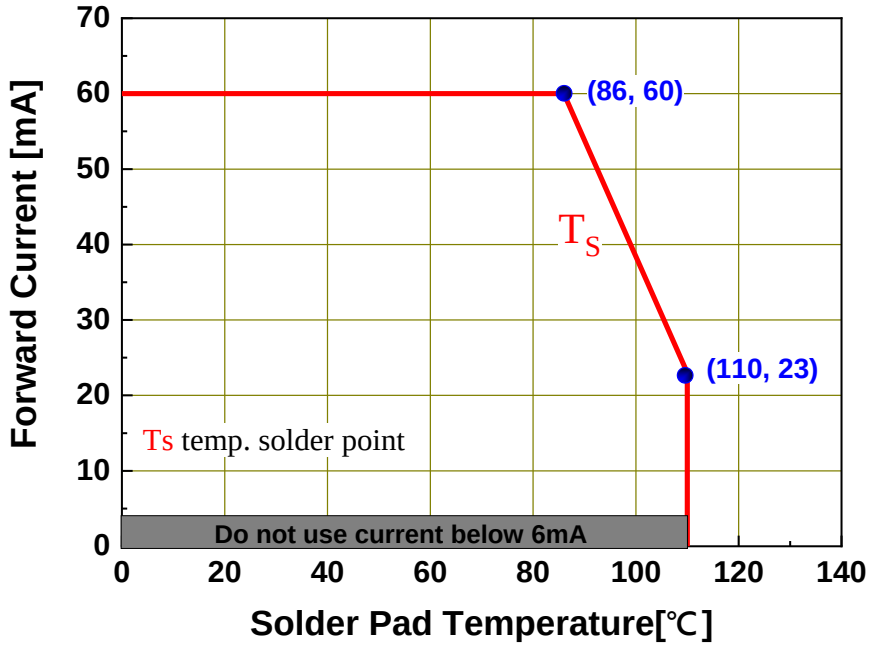

Permissible Pulse Handling Capability

D=Duty cycle , T_S = 25℃

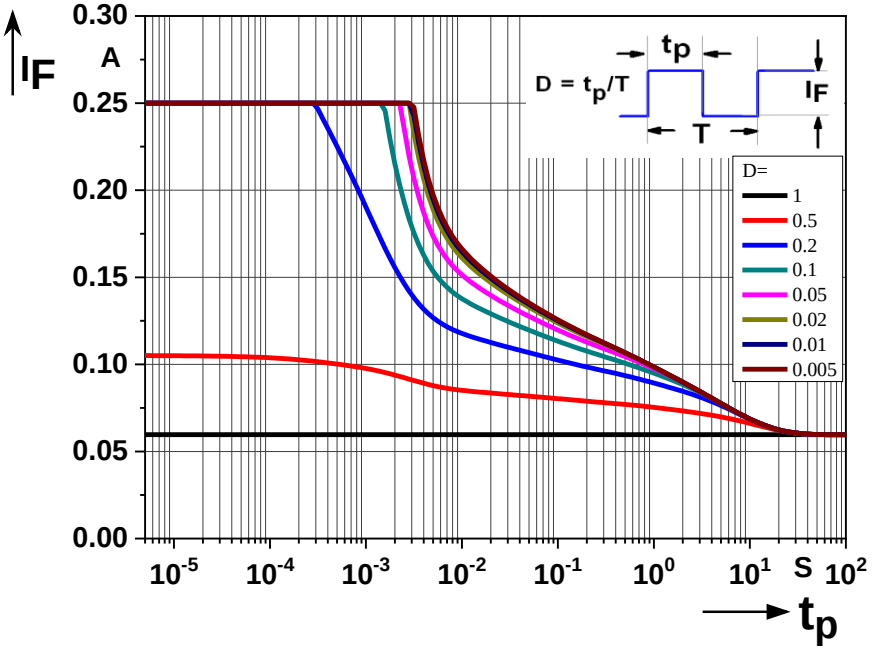

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

4. Binning Information

Luminous Intensity Bins


Group Bin	Minimum Luminous Intensity (mcd)	Maximum Luminous Intensity (mcd)
L1	11.2	14
L2	14	18
M1	18	22.4
M2	22.4	28
N1	28	35.5
N2	35.5	45
P1	45	56
P2	56	71
Q1	71	90
Q2	90	112
R1	112	140
R2	140	180
S1	180	224
S2	224	280
T1	280	355
T2	355	450
U1	450	560
U2	560	710
V1	710	900
V2	900	1120
AA	1120	1400
AB	1400	1800
BA	1800	2240
BB	2240	2800
CA	2800	3550
CB	3550	4500
DA	4500	5600
DB	5600	7100
EA	7100	9000
EB	9000	11200
FA	11200	14000
FB	14000	18000
GA	18000	22400

Notes:

1. Luminous flux measurement tolerance: ±11%.
2. Highlighted Black Box is possible output bins.

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

Standard White Color Bin Structure

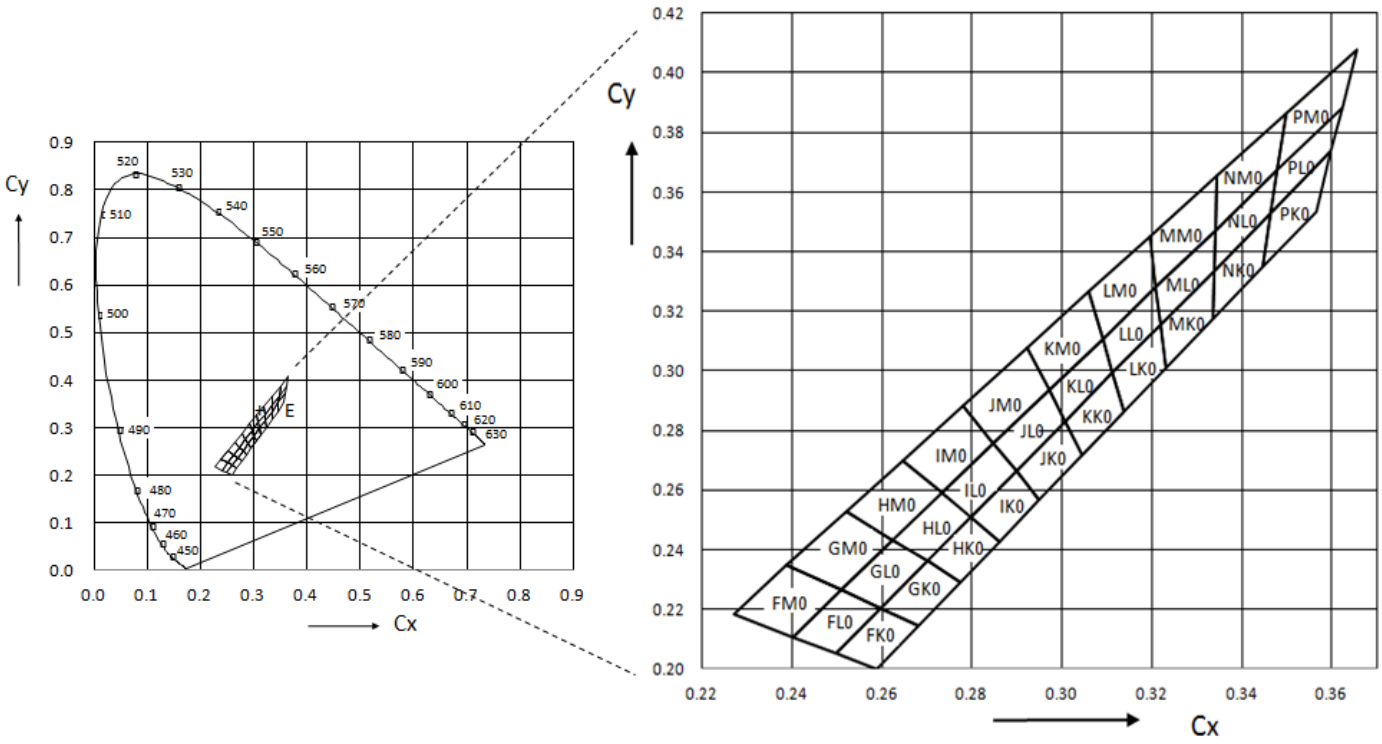

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

Cool White Color Bin Coordinates

Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
FK0	0.2589	0.2000	NK0	0.3339	0.3336
	0.2498	0.2053		0.3335	0.3172
	0.2597	0.2204		0.3447	0.3347
	0.2682	0.2146		0.3465	0.3530
GK0	0.2682	0.2146	PK0	0.3465	0.3530
	0.2597	0.2204		0.3447	0.3347
	0.2700	0.2361		0.3567	0.3535
	0.2775	0.2292		0.3599	0.3735
HK0	0.2775	0.2292	FL0	0.2498	0.2053
	0.2700	0.2361		0.2402	0.2108
	0.2797	0.2509		0.2509	0.2264
	0.2861	0.2427		0.2597	0.2204
IK0	0.2861	0.2427	GL0	0.2597	0.2204
	0.2797	0.2509		0.2509	0.2264
	0.2898	0.2664		0.2624	0.2431
	0.2950	0.2568		0.2700	0.2361
JK0	0.2950	0.2568	HL0	0.2700	0.2361
	0.2898	0.2664		0.2624	0.2431
	0.3007	0.2830		0.2733	0.2590
	0.3045	0.2717		0.2797	0.2509
KK0	0.3045	0.2717	IL0	0.2797	0.2509
	0.3007	0.2830		0.2733	0.2590
	0.3113	0.2992		0.2848	0.2757
	0.3138	0.2862		0.2898	0.2664
LK0	0.3138	0.2862	JL0	0.2898	0.2664
	0.3113	0.2992		0.2848	0.2757
	0.3219	0.3154		0.2971	0.2935
	0.3231	0.3008		0.3007	0.2830
MK0	0.3339	0.3336	KL0	0.3007	0.2830
	0.3219	0.3154		0.2971	0.2935
	0.3231	0.3008		0.3090	0.3108
	0.3335	0.3172		0.3113	0.2992

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

Cool White Color Bin Coordinates

Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
LL0	0.3113	0.2992	IM0	0.2733	0.2590
	0.3090	0.3108		0.2646	0.2700
	0.3209	0.3281		0.2780	0.2883
	0.3219	0.3154		0.2848	0.2757
ML0	0.3341	0.3472	JM0	0.2848	0.2757
	0.3209	0.3281		0.2780	0.2883
	0.3219	0.3154		0.2922	0.3077
	0.3339	0.3336		0.2971	0.2935
NL0	0.3341	0.3472	KM0	0.2971	0.2935
	0.3339	0.3336		0.2922	0.3077
	0.3465	0.3530		0.3060	0.3266
	0.3479	0.3673		0.3090	0.3108
PL0	0.3479	0.3673	LM0	0.3090	0.3108
	0.3465	0.3530		0.3060	0.3266
	0.3599	0.3735		0.3196	0.3451
	0.3623	0.3882		0.3209	0.3281
FM0	0.2388	0.2348	MM0	0.3345	0.3654
	0.2269	0.2185		0.3196	0.3451
	0.2402	0.2108		0.3209	0.3281
	0.2509	0.2264		0.3341	0.3472
GM0	0.2509	0.2264	NM0	0.3345	0.3654
	0.2388	0.2348		0.3341	0.3472
	0.2520	0.2527		0.3479	0.3673
	0.2624	0.2431		0.3498	0.3863
HM0	0.2624	0.2431	PM0	0.3498	0.3863
	0.2520	0.2527		0.3479	0.3673
	0.2646	0.2700		0.3623	0.3882
	0.2733	0.2590		0.3655	0.4079

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

Forward Voltage Bins

Bin code	Min Forward Voltage [V]	Max Forward Voltage [V]
1012	1.00	1.25
1215	1.25	1.50
1517	1.50	1.75
1720	1.75	2.00
2022	2.00	2.25
2225	2.25	2.50
2527	2.50	2.75
2730	2.75	3.00
3032	3.00	3.25
3235	3.25	3.50
3537	3.50	3.75
3740	3.75	4.00
4042	4.00	4.25
4245	4.25	4.50
4547	4.50	4.75
4750	4.75	5.00
5052	5.00	5.25
5255	5.25	5.50
5557	5.50	5.75
5760	5.75	6.00
6062	6.00	6.25
6265	6.25	6.50
6567	6.50	6.75
6770	6.75	7.00

Notes:

1. Forward voltage measurement tolerance: ±0.05V.
2. Forward voltage bins are defined at I_F = 50mA operation.

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

5. Part Number

57-11-C70300H-AM

Part number is designated with below details.

57-11 = Product family name.

C = Color [1]

7 = CRI (0=N/A; >70%=7; >80%=8; >90%=9)

030 = Test current [mA]

0 = internal code

H = Brightness Level (H=High ; M=Medium ; L=Low)

AM = Automotive application

Note

[1] Color :

Symbol	Description
C	Cool White
N	Neutral White
W	Warm White
PA	Phosphor Converted Amber
PR	Phosphor Converted Red
UB	Blue
IB	Ice Blue
SB	Sky Blue
UP	Purple
UG	Green
UY	Yellow
UYG	Brilliant Yellow Green
UPG	Pale Green
SO	Amber
UR	Red
SR	Super Red
RGB	RGB-Color
PYG	Phosphor Converted Yellow Green

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

6. Ordering Information

57-11-C70300H-ABCDEFGHJKLMNO-PQ-AM

Part Number of the 57-11	Order Code
57-11-C70300H-AM	57-11-C70300H-ABCDEFGHJKLMNO-PQ-AM

Order code contains information with below details：

ABCDEF = min/max wavelength or CCT

GHJK = min./max. luminous flux in [lm] or luminous intensity in [mcd]

LMNO = min./max. forward voltage


PQ = internal code

AM = Automotive Application

EMM = Customer Code

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

7. Mechanical Dimension

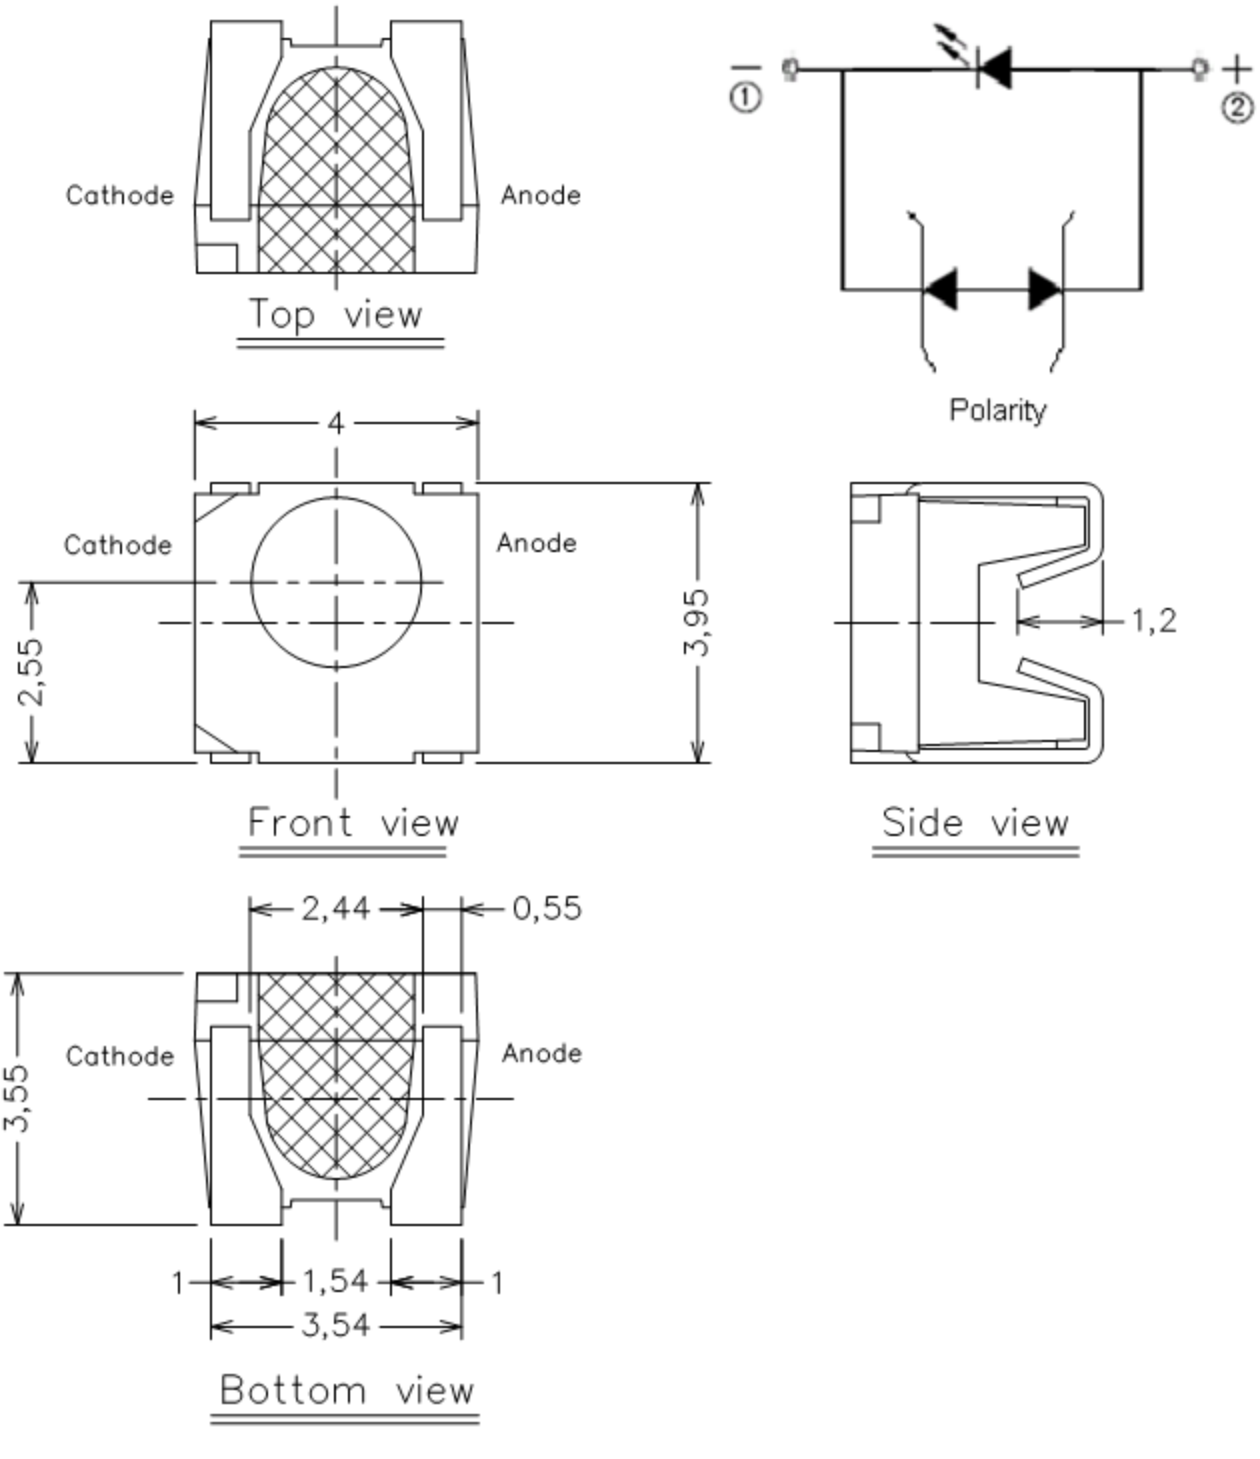


Notes:

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are ± 0.1mm.


Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

8. Recommended Soldering Pad

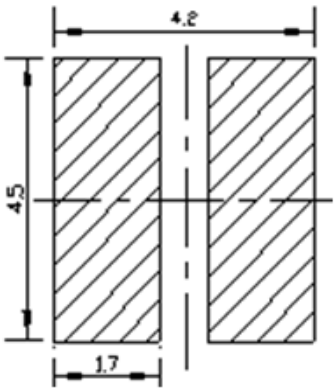

9. Reflow Soldering Profile

Soldering Condition (Reference: IPC/JEDEC J-STD-020D)

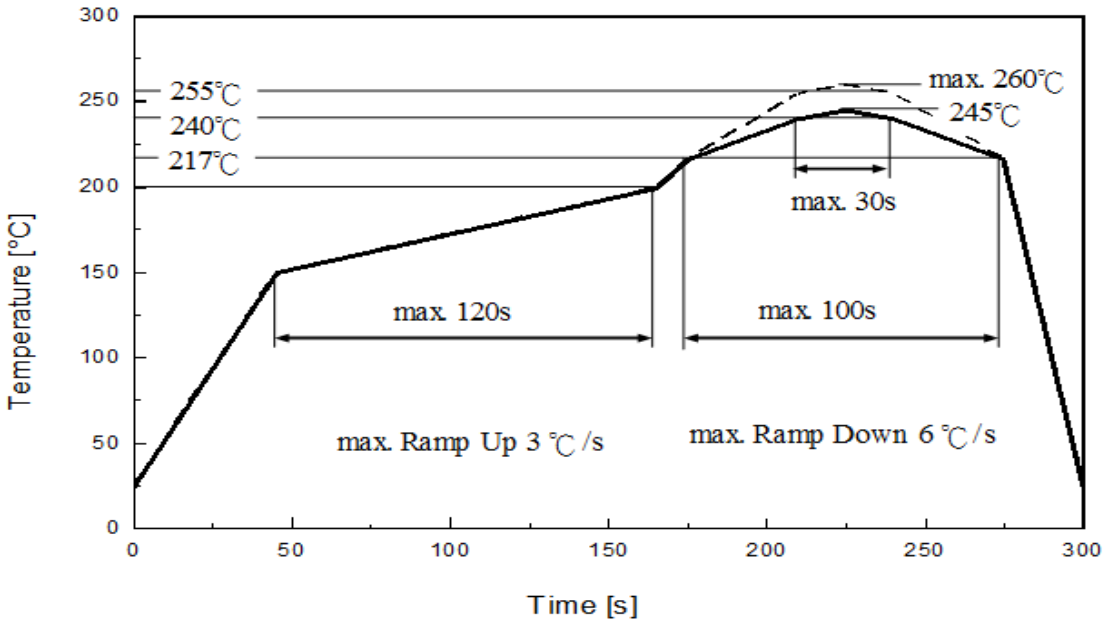

Profile Feature	Pb-Free Assembly Recommendation	Unit
Ramp-up rate to preheat 25 °C to 150 °C	3	°C /sec
Time of soaking zone 150 °C to 200 °C	120	sec
Ramp-up rate to peak	3	°C /sec
Liquidus temperature	217	°C
Time above liquidus temperature	100	sec
Peak temperature (max.)	260	°C
Time within 5°C of the specified peak temperature	30	sec
Ramp-down Rate (max.)	6	°C /sec

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1


10. Packaging Information

• Product Labeling



- CPN：Customer's Product Number
- P/N：Everlight Part Number
- QTY：Packing Quantity
- CAT：Luminous Flux (Brightness) Bin
- HUE：Color Bin
- REF：Forward Voltage Bin
- LOT No：Lot Number

• Packing: Loaded Quantity 2000 pcs Per Reel

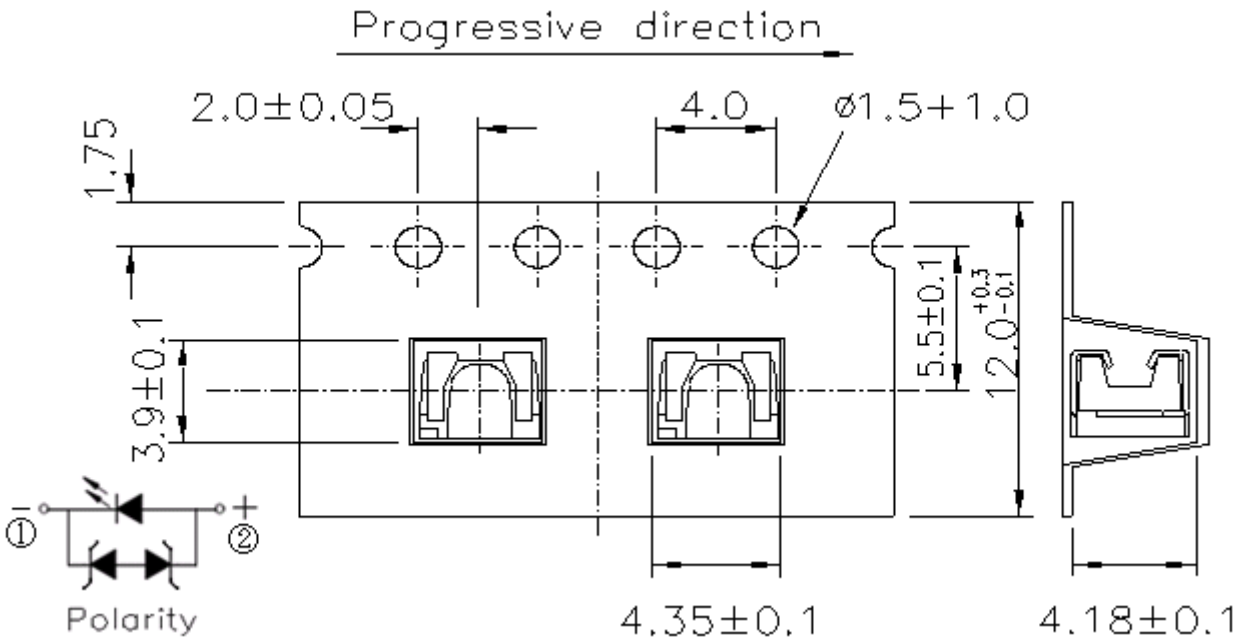


Notes:

1. Dimensions are in millimeters.

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

● Reel Dimensions

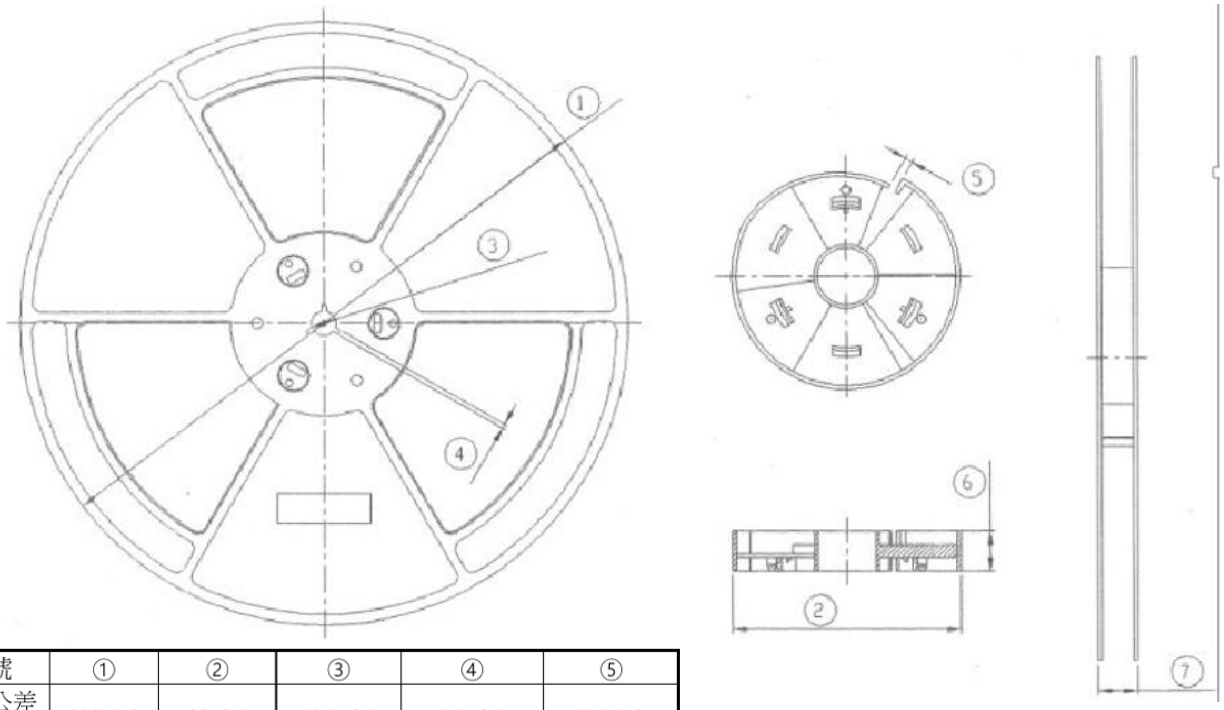


尺寸編號	①	②	③	④	⑤
標準尺寸公差 Std. Dimension	330±1.0	99±0.5	13.5±0.5	2.5±0.5	3.5±1.0
尺寸編號	⑥	⑦			
標準尺寸公差 Std. Dimension	9.4±1.0	13.4±1.0			

Notes:

1. Dimensions are in millimeters.

● Moisture Resistant Packing Process

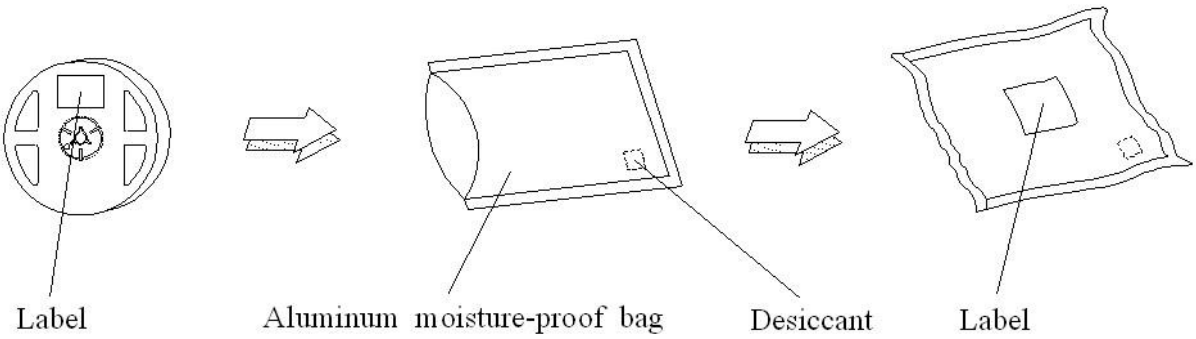

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

11. Precaution for Use


1. Over-current-proof
   Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (burn out will happen).

2. Assemblies
   Do not stack assemblies containing LEDs to prevent damage to the optical surface of LEDs. Forces applied to the optical surface may result in the surface being damaged.

3. Soldering Condition
   3.1 When soldering, do not put stress on the LEDs during heating.
   3.2 After soldering, do not warp the circuit board.

4. Soldering Iron
   Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing
   Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

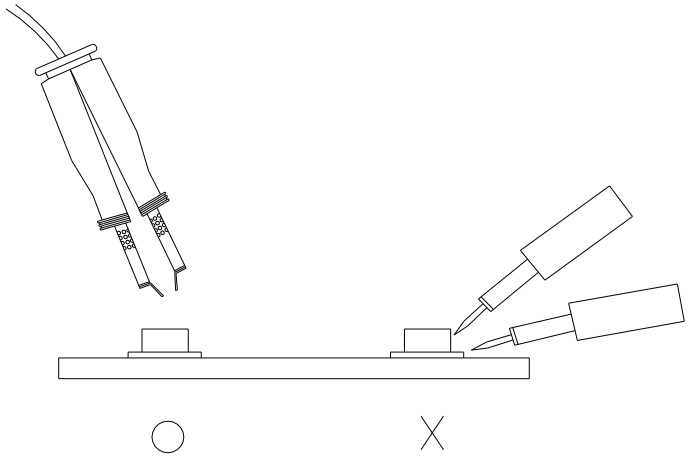

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1

12. Sulfur Test Criteria

Products	Failure Criteria
Exterior Lighting products	Luminous Flux +/-20%, forward voltage +/-10%, color coordinates x,y +/-0.01, color wavelength +/- 2 nm Visual defect issue following Everlight's inspection criteria
Interior lighting products	Luminous Flux +/-30% or +/-50% for some application, forward voltage +/-10%, color coordinates x,y +/-0.02, color wavelength +/- 2 nm Visual defect issue following Everlight's inspection criteria
Grade of H2S and FMG test	Please refer to the table as below. As for discolor, please refer to the Frame blackening after Grade of H2S and FMG test defect under Everlight's inspection criteria

	Grade A0	Grade A1	Grade B0	Grade B1
C12 H2S Class A C13 FMG	No corrosion	Corrosion without the impact on reliability and life time, following AEC-Q102 rev. A		
C12 H2S Class B C13 FMG			No corrosion	Corrosion without the impact on reliability and life time, following AEC-Q102 rev. A

Class for H2S Test & FMG	Description	
	H2S	FMG
Class A	15 ppm with duration 336 h at 40 °C and 90% RH.	Duration 500 h at 25 °C and 75% RH. H2S concentration: 10ppb SO2 concentration: 200ppb NO2 concentration: 200ppb Cl2 concentration: 10ppb
Class B	10 ppm with duration 500 h at 25 °C and 75% RH.	

Class for H2S Test & FMG	Description
0	No corrosion found
1	Corrosion without the impact on reliability and life time, following AEC-Q102 rev. A

Copyright © 2014, Everlight All Rights Reserved. Release Date: 17.July.2025 Issue Rev.1